


Comments:


NOMINALS

Profile: WR15 Material: multipart

NA
NI
NH

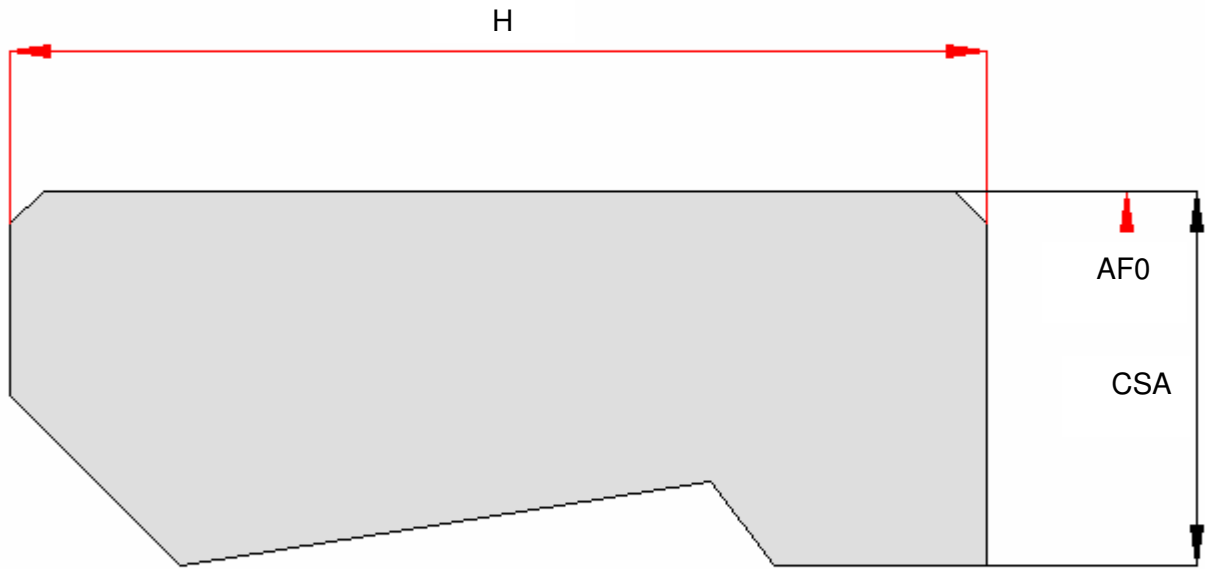

Nennaußendurchmesser		AFO	H	CONTROL DIMENSIONS
	<=30	+/-0,05	+/-0,1	
> 30	<= 60	+/-0,1	+/-0,2	
> 60	<=100	+/-0,1	+/-0,2	
>100	<=150	+/-0,2	+/-0,2	
>150	<=250	+/-0,2	+/-0,2	
>250	<=350	+/-0,3	+/-0,2	
>350	<=500	+/-0,4	+/-0,2	
>500		+/-0,5	+/-0,2	
Nennbreite		CSA		
	<= 5,0	+/-0,05		
> 5,0	<= 6,0			
> 6,0	<= 7,5			
> 7,5	<=10,0	+/-0,05		
>10	<=12,5			
>12,5	<=15,0			
>15,0	<=20,0			
>20,0	<=25,0	+/-0,1		
>25,0	<=30,0			
>30,0				

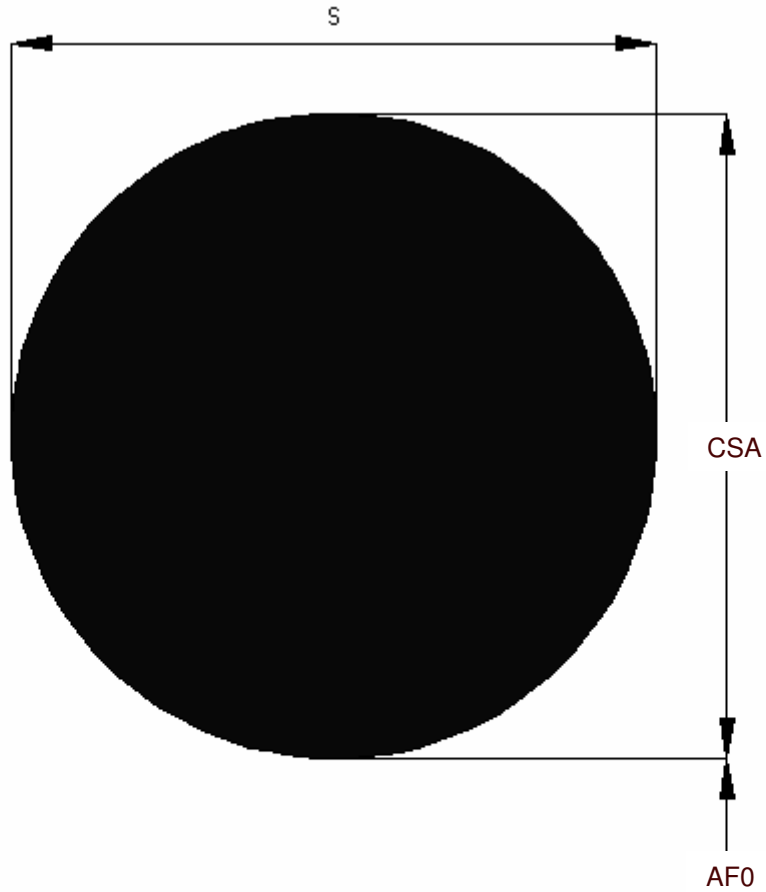

Nenninnendurchmesser			AFO		CONTROL DIMENSIONS	
> 6,7	<= 11,2		+/-0,16		Profile: OR-WR15 Material: NA NI NH	
> 11,2	<= 22		+/-0,19			
> 22	<= 40		+/-0,2			
> 40	<= 80		+/-0,4			
> 80	<= 160		+/-0,7			
>160	<= 300		+/-1,2			
>300	<= 650		+/-2,2			
>650	<= 910		+/-4,3			
>910	<=1200		+/-5,6			
>1200			+/-6,5			
O-Ringdurchmesser		CSA	S		10.08.2007	
	<= 2	+/-0,08	+ 0,05	- 0,08		
> 2	<= 3	+/-0,09		- 0,10		
> 3	<= 5,3	+/-0,10		- 0,13		
> 5,3	<= 7	+/-0,13		- 0,13		
> 7	<= 8	+/-0,15		- 0,15		
> 8	<= 10	+/-0,18		- 0,18		
>10	<= 12	+/-0,21		- 0,21		
>12		+/-0,25		- 0,25		