

CONTROL DIMENSIONS


Profil: RS09-01 Werkstoff:

NA
NI
NH

NA		AF / IF
	≤ 40	$\pm 0,05$
> 40	≤ 80	$\pm 0,10$
> 80	≤ 120	$\pm 0,20$
> 120	≤ 250	$\pm 0,30$
> 250	≤ 400	$\pm 0,40$
> 400	≤ 600	$\pm 0,50$
> 600	≤ 800	$\pm 0,60$
> 800	≤ 1000	$\pm 0,80$
> 1000		$\pm 1,00$
H$\leq 6,3$	H$> 6,3$	CSA
$\pm 0,05$	$\pm 0,1$	$\pm 0,05$

SML Systemsoftware 3.1

19.05.2008

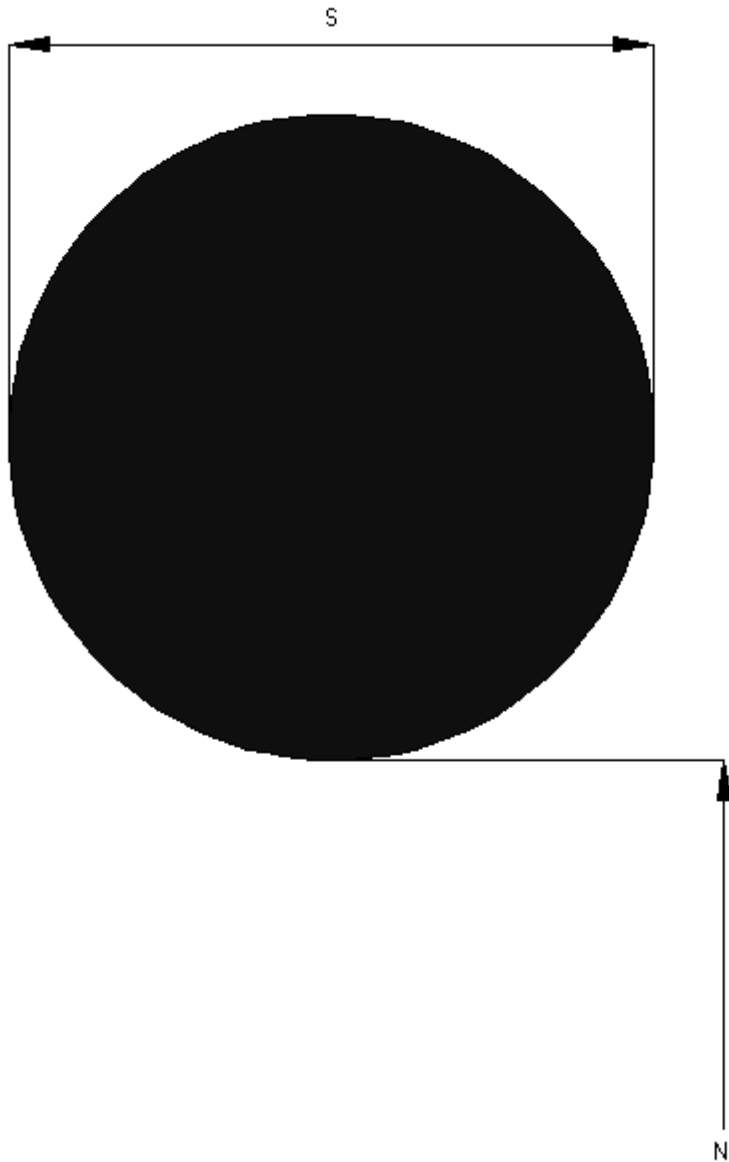

NI		NI
	<=11,2	+/-0,16
>11,2	<=22	+/-0,19
>22	<=40	+/-0,2
>40	<=80	+/-0,4
>80	<=160	+/-0,7
>160	<=300	+/-1,2
>300	<=650	+/-2,2
>650	<=910	+/-4,3
>910	<=1200	+/-5,6
>1200		+/-6,5
O-Ringdiameter		S
	<=2	+/-0,08
>2	<=3	+/-0,09
>3	<=5	+/-0,10
>5	<=7	+/-0,13
>7	<=8	+/-0,15
>8	<=10	+/-0,18
>10	<=12	+/-0,21
>12		+/-0,25

CONTROL DIMENSIONS

Profile: OR Material:

NI
S