


Nennaußendurchmesser		AF / AV / IF	NH	<b>CONTROL DIMENSIONS</b>	
	<=30	+/-0,05	+/-0,1		
> 30	<= 60	+/-0,1	+/-0,2		
> 60	<=100	+/-0,1	+/-0,2		
>100	<=150	+/-0,2	+/-0,2		
>150	<=250	+/-0,2	+/-0,2		
>250	<=350	+/-0,3	+/-0,2		
>350	<=500	+/-0,4	+/-0,2		
>500		+/-0,5	+/-0,2		
Nennbreite		CSA	CSR		
	<= 5,0	+/-0,05	+/-0,1		
> 5,0	<= 6,0		+/-0,05		
> 6,0	<= 7,5				
> 7,5	<=10,0				
>10	<=12,5				
>12,5	<=15,0				
>15,0	<=20,0	+/-0,1			
>20,0	<=25,0				
>25,0	<=30,0				
>30,0					

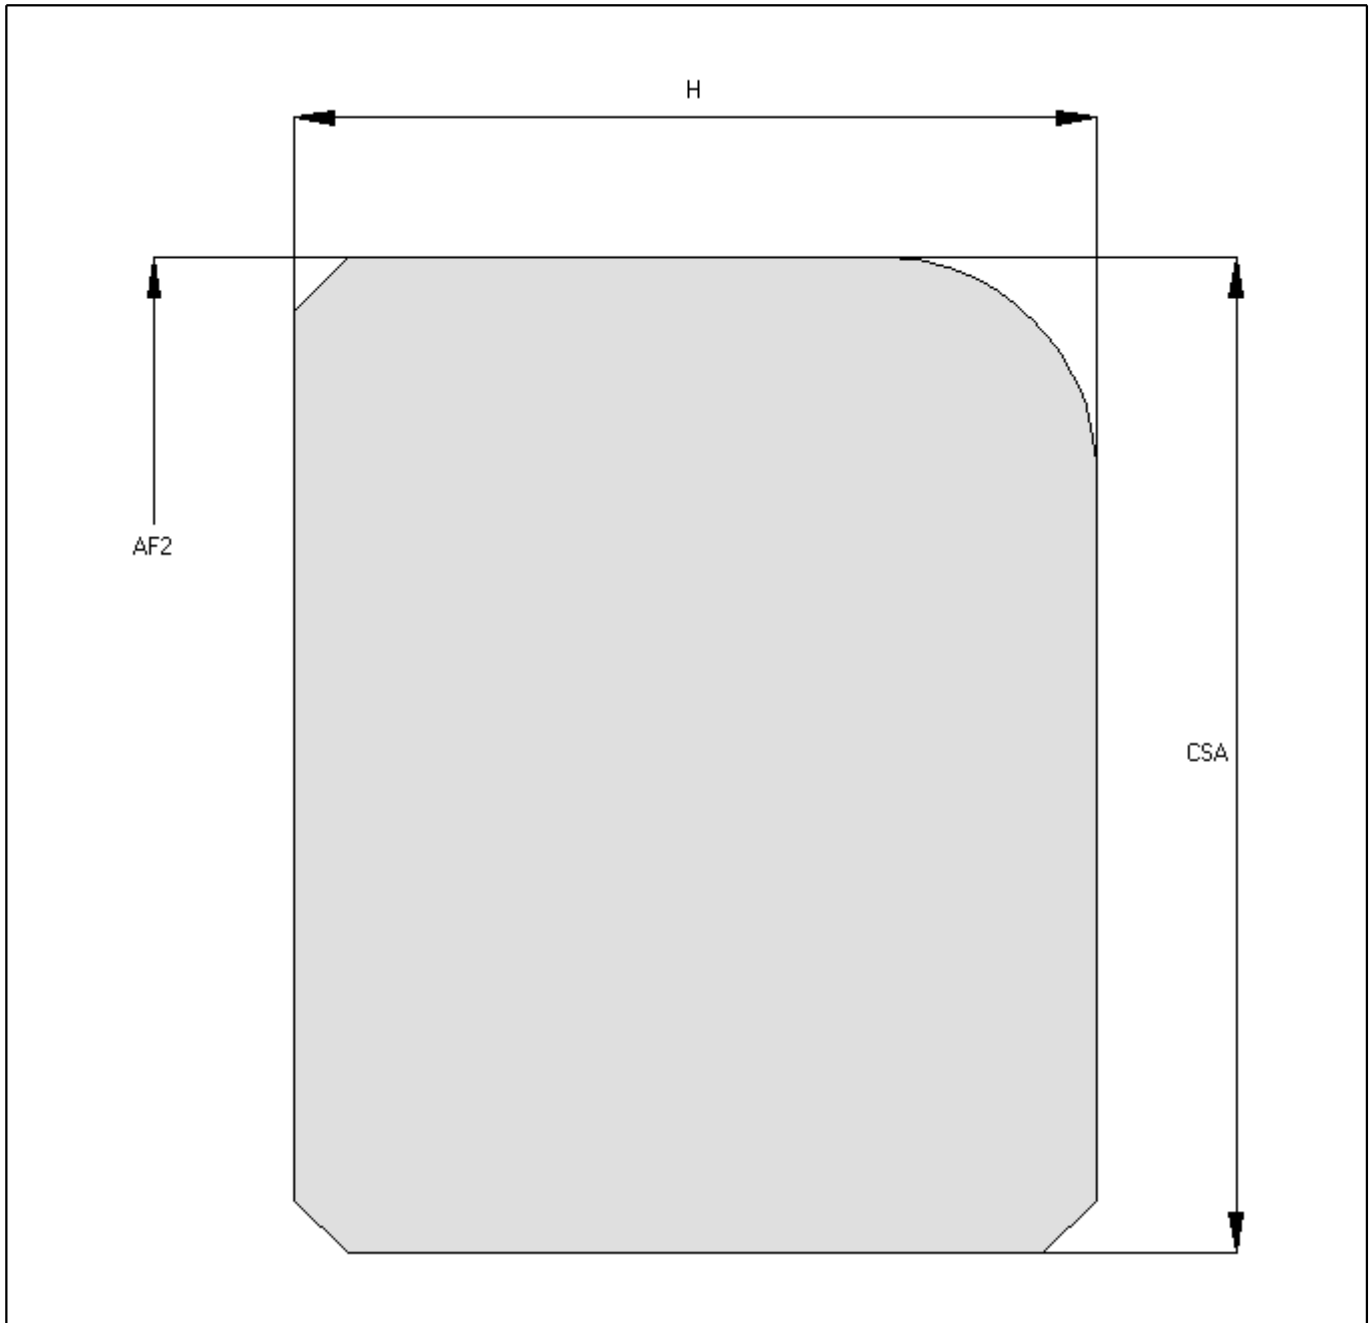

### CONTROL DIMENSIONS

Profil: RS20-02      Werkstoff:

NA  
NI  
NH  
CUT

NA		AF2 / NI_
	<=30	+/-0,05
>30	<=100	+/-0,1
>100	<=200	+/-0,2
>200	<=350	+/-0,3
>350	<=500	+/-0,4
>500	<=750	+/-0,5
>750	<=1000	+/-0,7
>1000		+/-1,0
<b>H</b>		<b>CSA</b>
+0,05/-0,15		+/-0,05

SML Systemsoftware 3.1

20.05.2008